Page 1 of 2 Draper FlexShade Order Form — Skylight 2 FlexShade Facility Name: Ship to: Charge to (Dealer/Acct. #): For Dealer Use Attention: _____ (required) Order Date: Address: P.O. #: ___ Tag/Job#: City/State/Zip: Draper Phone: _____ Quote #: Choose motor: ☐ 110V-120V (std) ☐ RTS Ship ☐ Prepaid ☐ RTS 220V ☐ Collect □ 220V Installation Options: ☐ Incline-Up ☐ Incline-Down ☐ Vertical-Up ☐ Vertical-Down ☐ Horizontal (See page 2 for more and to provide required information) Operator Measure' Location (check one) Dimensions (inches) Fabric Number and Color Room/Loc. | Quantity | IM | OM Width Exact Length (Type or Style) R Unit Price Extension Notes on ordering Skylight 2 FlexShade Systems (see reverse for control options): *IM—inside measure. Draper will deduct 1/8" from your exact opening dimension in both width and height for **Special Instructions:** Skylights. Be sure several measurements are taken to discover any irregularities in the opening. *OM—outside measure. Draper will fabricate the unit to your exact dimensions, taking no deductions. For "Exact Height" please include any shade hardware in measurement.

Signature:

Phone: (800) 238-7999 FAX: (866) 637-5611 E-Mail to your Sales Representative


Lead times for 220V motors may be longer; contact Draper for details.


Brackets and Hem Bar finished white.

Please see page 2 to select installation option.

Skylight 2 FlexShades

Installation Options

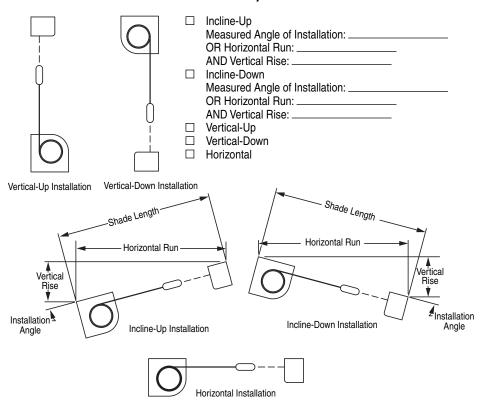

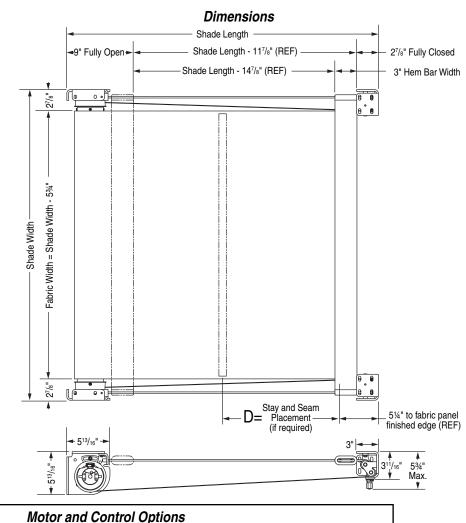

411 S. Pearl St., Spiceland, IN 47385 USA **■** 765-987-7999 www.draperinc.com ■ fax 866-637-5611

Copyright © 2011 Draper Inc. Form Skylight2FlexShade_OrderForm11 Printed in U.S.A.

	Standard	110-120V	AC	Motor
	Controls			

☐ 110-120V Wall Switch for Single Shade Control □ Low Voltage and/or Multiple Shade Control*

Please see Draper's IntelliFlex Controls Reference Sheet and IntelliFlex® Control System Planning Sheet to design a control solution for this product. The forms are available at www.draperinc.com, or by contacting Draper.

☐ Radio Technology 110-120V AC Motor **Controls**

□ Remote Controls for Radio-Frequency Motors

- ☐ 1-Channel Transmitter
- ☐ 4-Channel Transmitter
- ☐ 5-Channel Transmitter with scroll wheel

- ☐ 5-Channel Transmitter with scroll wheel
 ☐ Dry Contact Interface
 ☐ Single Motor Sun Sensor
 ☐ Radio Frequency Wall Switch
 ☐ 1-Channel (Circle one: White/Ivory)
 ☐ 4-Channel (Circle one: White/Ivory)
 ☐ Chronis 1-Channel with 24-hour Timer
- ☐ Multi-Link Universal RTS Interface (5-channel)
- ☐ Multi-Link RS232 to RTS Interface (16-channél)