

6⁵/₈" OD 8'0"

High School and Collegiate
Goalposts and Accessories

by **DRAPER**

Extension Football Goalposts

Please Mark Appropriate Selections

Select Goalposts



- 505127—6⁵/₈" OD 8' extension Yellow High School
- 505129—6⁵/₈" OD 8' extension Yellow Collegiate

Optional Goalpost Pads—5051xx

- | | |
|--|--|
| <input type="checkbox"/> Marine Blue-02 | <input type="checkbox"/> Maroon-09 |
| <input type="checkbox"/> Red-04 | <input type="checkbox"/> Dark Blue/Royal Blue-10 |
| <input type="checkbox"/> Orange-06 | <input type="checkbox"/> Black-11 |
| <input type="checkbox"/> Yellow/Gold-07 | <input type="checkbox"/> Purple-12 |
| <input type="checkbox"/> Grey-08 | <input type="checkbox"/> Forest Green-13 |
| <input type="checkbox"/> Navy Blue-15 | <input type="checkbox"/> Kelly Green-14 |
| <input type="checkbox"/> Custom Color: _____ | |

Other Options

- Optional Ground Sleeve 505099—6⁵/₈" OD

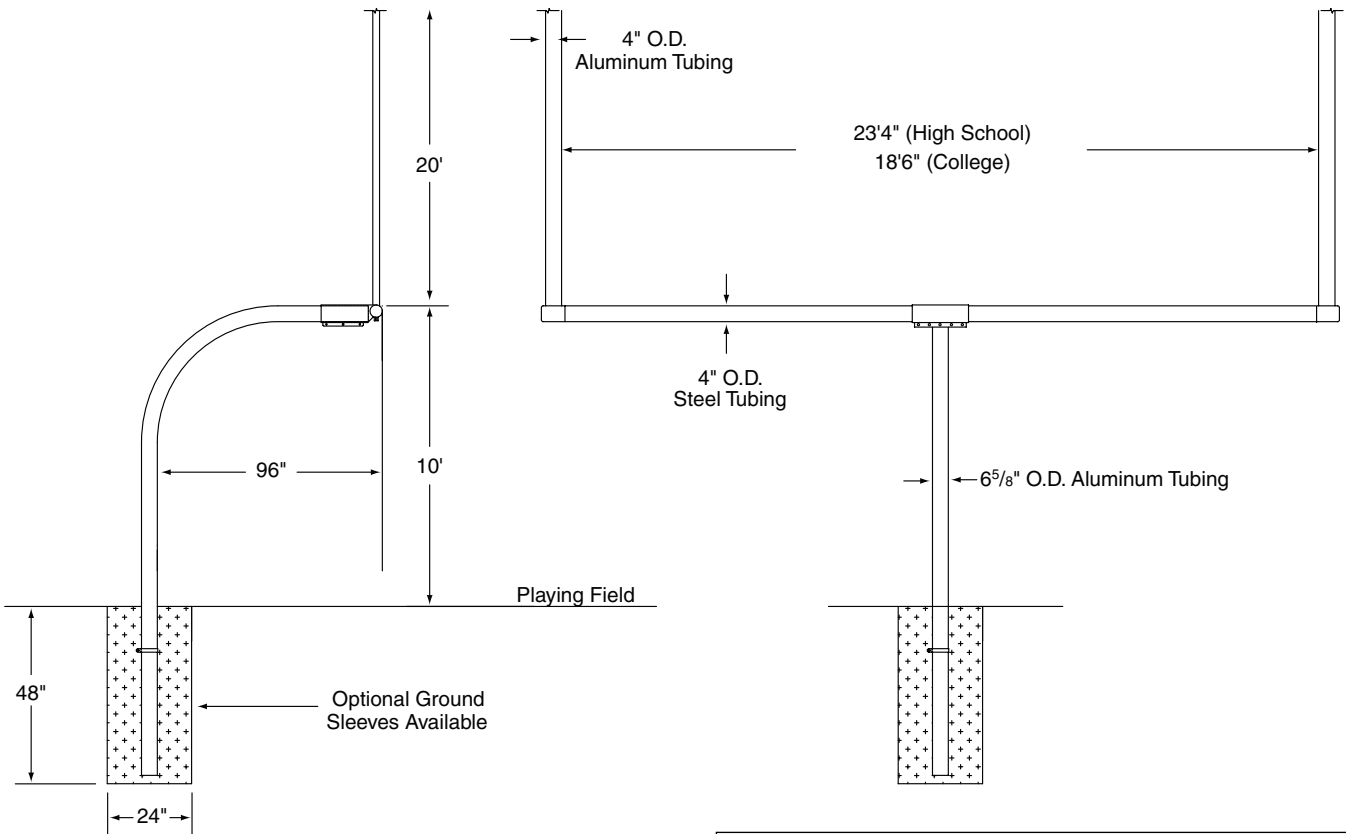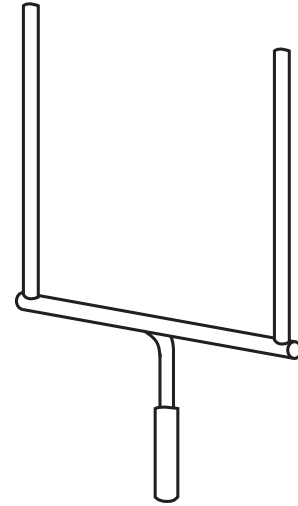

DRAPER®

411 S. Pearl St., Spiceland, IN 47385 USA ■ 765-987-7999
www.draperinc.com ■ fax 765-987-7142

Copyright © 2009 Draper Inc. Form 6⁵/₈"_Footext_FootballGoalposts_Sub09 Printed in U.S.A.

PROJECT: _____

ARCHITECT: _____

CONTRACTOR: _____

SUPPLIER: _____

DATE: _____ REVISED: _____

Extension Football Goalposts

Specifications—505127 6⁵/₈" - 8'0" Extension Gooseneck High School Goalposts

Gooseneck High School Goalposts shall be provided by Draper, Inc., of Spiceland, IN.

Goalposts shall meet all National High School Federation rules. Goalposts shall be of the single bent post design and provide a minimum of 96" of setback from the front of the post to the front of the horizontal crossbar. The bent post shall be a minimum of 6⁵/₈" diameter heavy wall aluminum tubing and provide for no less than 48" bury into the ground.

Horizontal crossbars shall be no less than 4" diameter heavy wall aluminum tubing and be of a length to allow uprights to extend upward with official high school 23'4" between the upright members. Two vertical uprights shall rise a minimum of 20' above the top of the crossbar. Uprights shall be constructed of 4" OD heavy wall aluminum tube. Uprights shall be connected to each end of the crossbar by means of a fitting that allows the angle of the uprights to be adjusted at the time of field installation. The crossbar shall be attached to the bent post by means of an adjustable "T" adapter that allows field adjustment of the horizontal crossbar for ease and accuracy of installation.

Entire goal post set shall have a safety yellow powder coated finish. All hardware shall be zinc plated grade 5 minimum.

Optional features include ground sleeves and safety padding. Shipping weight approximately 1075 lbs. per pair.

Specifications—505129 6⁵/₈" - 8'0" Extension Gooseneck Collegiate Goalposts

Gooseneck College Goalposts shall be provided by Draper, Inc., of Spiceland, IN.

Goalposts shall meet all NCAA rules. Goalposts shall be of the single bent post design and provide a minimum of 96" of setback from the front of the post to the front of the horizontal crossbar. The bent post shall be a minimum of 6⁵/₈" diameter heavy wall aluminum tubing and provide for no less than 48" bury into the ground.

Horizontal crossbars shall be no less than 4" diameter heavy wall aluminum tubing and be of a length to allow uprights to extend upward with official collegiate 18'6" between the upright members. Two vertical uprights shall rise a minimum of 20' above the top of the crossbar. Uprights shall be constructed of 4" OD heavy wall aluminum tube. Uprights shall be connected to each end of the crossbar by means of a fitting that allows the angle of the uprights to be adjusted at the time of field installation. The crossbar shall be attached to the bent post by means of an adjustable "T" adapter that allows field adjustment of the horizontal crossbar for ease and accuracy of installation.

Entire goal post set shall have a safety yellow powder coated finish. All hardware shall be zinc plated grade 5 minimum.

Optional features include ground sleeves and safety padding. Shipping weight approximately 1000 lbs. per pair.

Specifications—505099 Optional Deluxe Adjustable Height Goalpost Ground Sleeves

Sleeves shall be specifically designed to allow removable and adjustable installation of Draper gooseneck style football goalposts.

Sleeves shall consist of steel tubing, a minimum of 50" long.

Sleeve design shall allow for height adjustment at installation. 10' official crossbar height.

Post shall be adjusted plumb by means of four 3/4" adjusting screws. An anti-rotation device shall hold the goalpost square to the field. Specify that sleeve is used for 6⁵/₈" OD goalposts. Shipping weight shall be 170 lbs each.

Specifications—5052xx Goalpost Padding

Padding shall meet all NCAA and National High School Federation rules. Foam shall be a minimum of 6" thick and be covered with sewn vinyl covering in 12 colors. Height shall be 72" minimum and be designed to attach by means of Velcro fasteners to all goalposts up to 6⁵/₈" diameter. Shipping weight shall be 20 lbs each.

**Downloadable 3-part specifications
are available at www.draperinc.com.**